

BWT bestdrink




The companions

BWT PREMIUM ūdens – perfekta mineralizācija ar magniju

BWT bestdrink PREMIUM ir filtrēšanas sistēma, kas īpaši paredzēta dzeramā ūdens attīrīšanai, lai to varētu baudīt no dzeramā ūdens dispenseriem. Pateicoties patentētajai BWT magnija tehnoloģijai, magnijs tiek mērķtiecīgi pievienots neapstrādātajam ūdenim, aizstājot kalciju. Šī mineralizācija ar magniju piešķir uzlabotajam ūdenim ļoti patīkamu, viegli mineralizētu garšu. Neatkarīgi no tā, vai ūdens ir atdzesēts vai neatdzesēts, gāzēts vai negāzēts, mineralizācija ar magniju uzlabo tā garšas īpašības un padara jebkuru ūdeni par PREMIUM ūdeni.

Turklāt piecu līmeņu filtrēšana samazina nevēlamu sastāvdaļu, piemēram, cieto daļiņu, organisko komponentu un hlora daudzumu. Filtrēšanas sistēma sastāv no filtra kārtiņiem, uz kuras ir uzskrūvēta BWT besthead filtra galva. Filtra galvas drošības vārsti novērš atgriezenisko plūsmu un nekontrolētu ūdens noplūdi. BWT bestdrink PREMIUM pārtikas nekaitīguma filtrēšanas sistēmas ir spiedienizturīgas un drošas. Tās var izmantot visā pasaulē jebkurā dzeramā ūdens iekārtā.

BWT besthead filtra galva

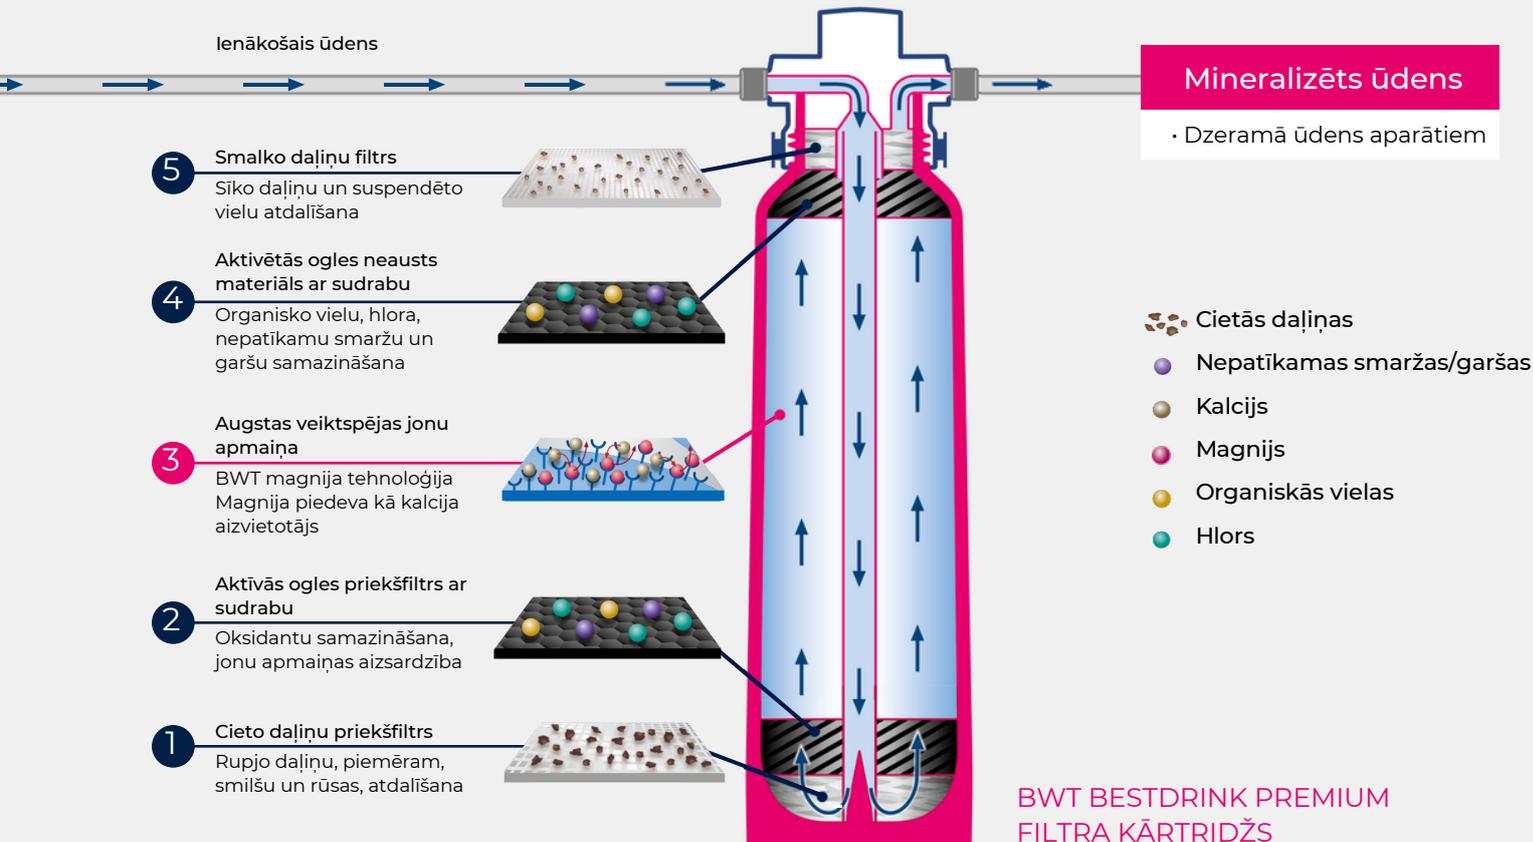

TEHNISKIE DATI

Filtra izmērs	S	V
Kopējais augstums bez kronšteina (A) mm	368	429
Savienojuma augstums (B) mm	307	368
Ø filtra kārtidžam (C) mm	88	110
Aptuvenais svars kg (sauss/ar ūdeni)	0,9 / 1,5	2,1 / 3,2
Filtra nomaiņa (mēneši)	ik pēc 6 vai 12*	ik pēc 6 vai 12*
Filtra kārtidža pasūtījuma nr.	FS22I00A00	FS23I00A00

* Ieteikums: regulāri nomainiet filtra kārtidžu ik pēc 6 mēnešiem, bet ne vēlāk kā pēc 12 mēnešiem vai kad filtrs ir sasniedzis savu kapacitāti.

UZSTĀDĪJUMI UN KAPACITĀTE/L (l) (nav apvedvārsta iestatījuma)


Ūdens dispenseriem (izmantojams tikai ar aukstu ūdeni līdz 30 °C)		
Vācu grādu kopējā cietība TH	Izmērs / modelis	
	S	V
4	5000	12500
5	4000	10000
6	3300	8330
7	2850	7140
8	2500	6250
9	2220	5550
10	2000	5000
11	1810	4540
12	1660	4160
13	1530	3840
14	1420	3570
15	1330	3330
16	1250	3120
17	1170	2940
18	1110	2770
19	1050	2630
20	1000	2500
21	950	2380
22	900	2270
23	870	2170
24	830	2080
25	800	2000

⁰⁾ Kapacitāte var atšķirties līdz ±5 % atkarībā no vietējās ūdens kvalitātes un tilpuma plūsmas. Neattiecas uz karstajiem dzērieniem, šādiem gadījumiem mēs iesakām izmantot BWT bestmax PREMIUM.

Informācija var tikt mainīta.

PIEDERUMI

	Apraksts	Pasūtījuma Nr.
BWT besthead FLEX filtra galva	BWT besthead FLEX ar 2 savienotājiem 90°, FLEX Insert, M 3/8", izgatavots no GFP	FS00Z20A00
BWT Filtra galvas komplekts Besthead FLEX 1	BWT besthead FLEX ar 2 savienotājiem 90°, FLEX Insert, M 3/8" izgatavots no GFP, savienojuma šļūtene DN 8, 1,5 m, ar lodveida vārstu, FLEX ieliktnis 90° likums izgatavots no GFP, uzgriežņa uzdeva FM 3/8", savienotājs taisns, FLEX ieliktnis × M 3/8" izgatavots no GFP, savienojums FM 3/4" × M 3/8" izgatavots no GFP	FS00Z39A00

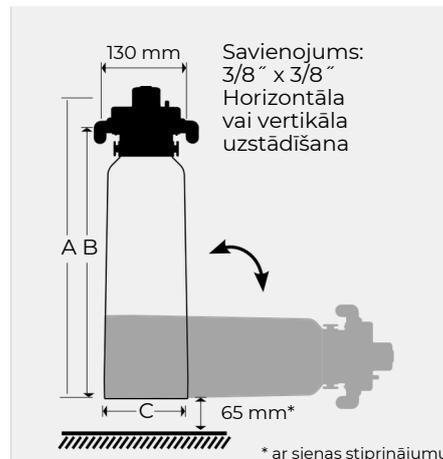

Eksploatācijas nosacījumi

Ienākošais spiediens: 2 – 8 bar
 Ūdens temperatūra: 4 – 30 °C
 Telpas temperatūra: 4 – 40 °C



RAŽOTĀJS:

BWT Holding GmbH:
 Walter-Simmer-Str. 4
 5310 Mondsee, Austria
 bw t-wam.com

IZPLATĪTĀJS:

Baltic Water SIA
 Valmieras street 43-2,
 Riga, Latvia, LV-1009
 info@balticwater.lv
 Tel.: +371 25438039

BWT bestdrink




The companions

BWT PREMIUM water – perfect mineralization with magnesium

BWT bestdrink PREMIUM is a filter system especially for the refinement of drinking water for enjoyment from drinking water dispensers. Thanks to the patented BWT Magnesium Technology, magnesium is added to the raw water in a targeted way, replacing the calcium. This mineralization in favour of magnesium gives the optimized water a very pleasant, slightly mineralized taste. Regardless of whether the water is chilled or not chilled, carbonated or still, mineralization with magnesium improves its sensory quality and turns all water into PREMIUM water.

In addition, the multi-stage filter reduces unwanted ingredients such as particles, organic components and chlorine. The filter system consists of a filter cartridge with a BWT besthead filter head screwed onto it. Check valves in the filter head prevent return flow and uncontrolled water escape. Food-safe BWT bestdrink PREMIUM filter systems are pressure-resistant and safe. They can be operated worldwide in any water dispensing unit.

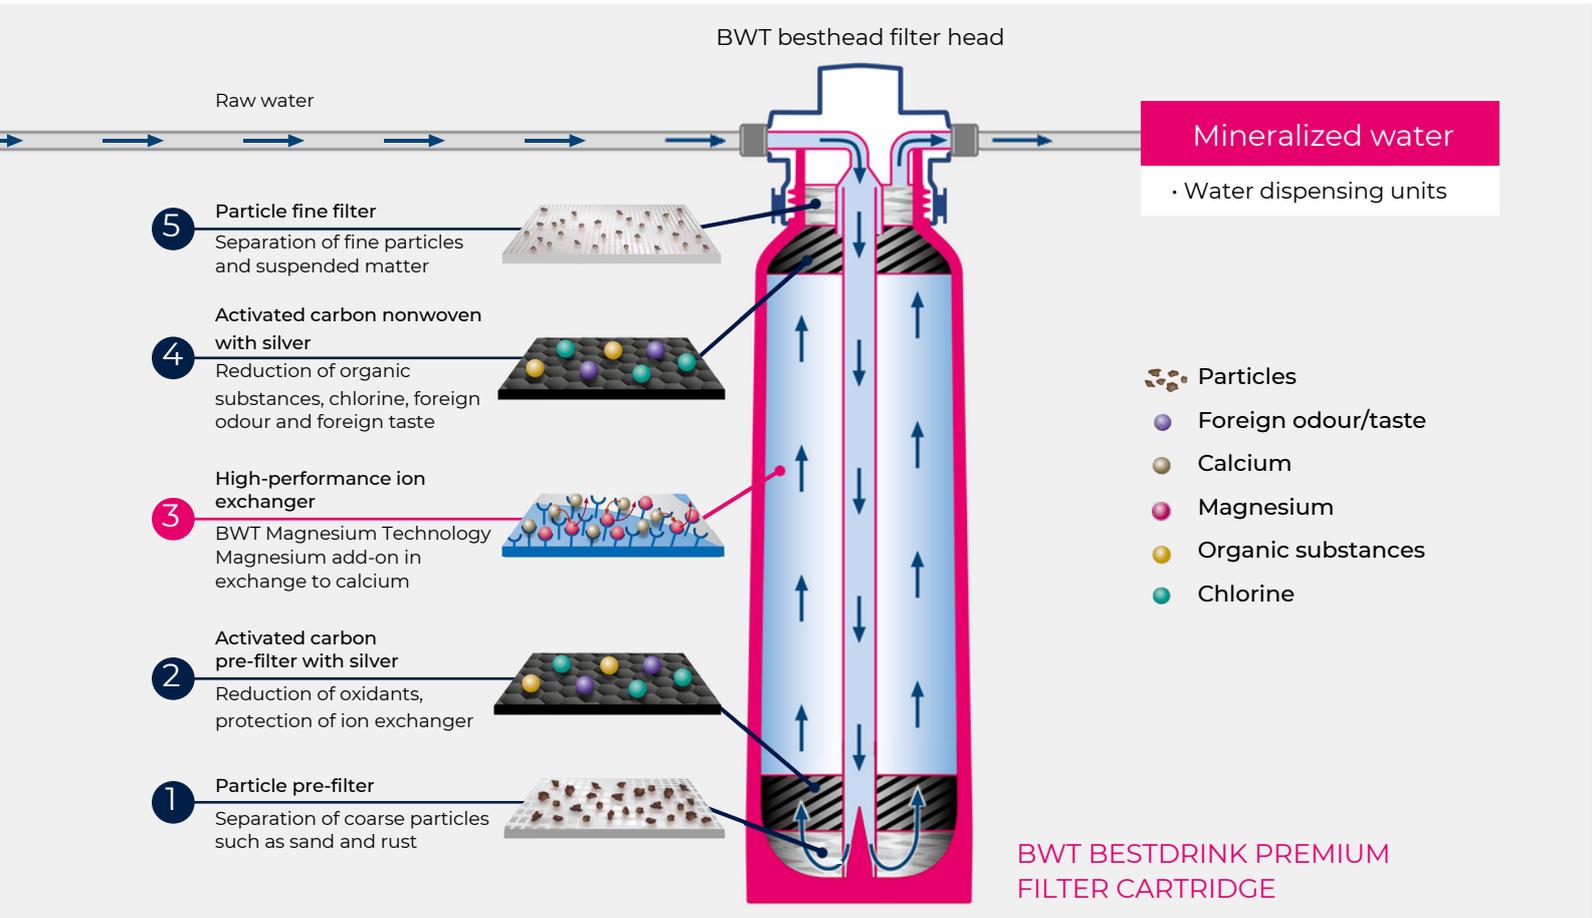

TECHNICAL DATA


Filter size	S	V
Total height without bracket (A) in mm	368	429
Connection height (B) in mm	307	368
Ø filter cartridge (C) in mm	88	110
Weight in kg (dry/wet)	0,9/1,5	2,1/3,2
Filter change after month	after 6 or 12*	after 6 or 12*
Order no. for filter cartridge	FS22I00A00	FS23I00A00

* Recommendation: Replace the filter cartridges regularly after 6 months, but at the latest after 12 months or when the filter capacity is reached.

SETTINGS AND CAPACITIES(1) (no bypass setting)

Water dispenser (Only for use with cold water up to 30 °C)		
German total hardness	Size	
	S	V
4	5000	12500
5	4000	10000
6	3300	8330
7	2850	7140
8	2500	6250
9	2220	5550
10	2000	5000
11	1810	4540
12	1660	4160
13	1530	3840
14	1420	3570
15	1330	3330
16	1250	3120
17	1170	2940
18	1110	2770
19	1050	2630
20	1000	2500
21	950	2380
22	900	2270
23	870	2170
24	830	2080
25	800	2000

¹⁾ Capacities may deviate by up to ±5% depending on the local water quality and volume flow. Not applicable for hot drinks, for those application we recommend BWT bestmax PREMIUM. Subject to change.

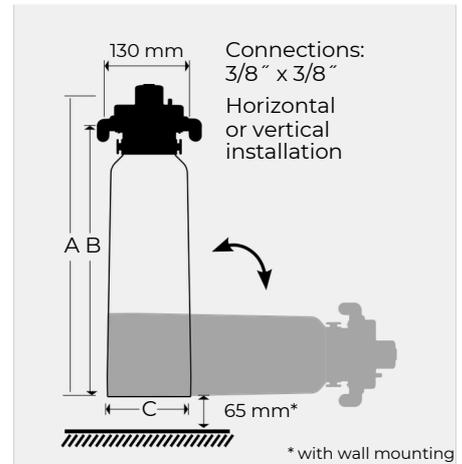

Operating conditions

Input pressure: 2 – 8 bar
 Water temperature: 4 – 30 °C
 Ambient temperature: 4 – 40 °C

ACCESSORIES

	Description	Order number
BWT besthead FLEX filter head	BWT besthead FLEX with 2 connectors 90° elbow, FLEX Insert, M 3/8" made from GFP	FS00Z20A00
BWT besthead FLEX Set 1	BWT besthead FLEX with 2 connectors 90° elbow, FLEX Insert, M 3/8" made from GFP, Connection hose DN 8, 1,5 m, with ball valve, FLEX Insert 90° elbow made from GFP, cap nut FM 3/8", Connector straight, FLEX Insert x M 3/8" made from GFP, Reduction FM 3/4" x M 3/8" made from GFP	FS00Z39A00



MANUFACTURER:

BWT Holding GmbH:
 Walter-Simmer-Str. 4
 5310 Mondsee, Austria
 bw t-wam.com

SALES:

Baltic Water SIA
 Valmieras street 43-2,
 Riga, Latvia, LV-1009
 info@balticwater.lv.
 Tel.: +371 25438039